


PV POWER CABLE

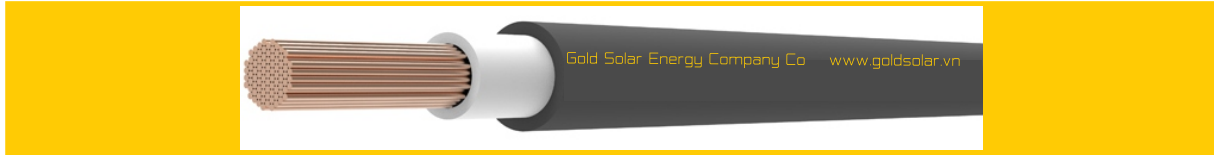

4.0 600/1000V CU/XLPE/PVC POWER CABLE

Conductor	Pure Copper Conductor
Insulation	XLPE Compound
Insulation Color	Blue/Red/Gey/Yellow/Green or As Request
Sheath	PVC Compound
Sheath Color	Black or As Request
Temperature	-20 To 90oC
Nominal Voltage	600/1000V
Test Voltage	3500V
Minimal Bending Radius	15D For Single Core - 12D for Multi Core
Standard	GB/T12706.2-2008

Technical Data

Coresz Conductor Cross-Section	Conductor Construction	External Diameter	Insulation Thickness	Sheath Thickness	Conductor Resistance At 20oC	Approx. overall diameter	Cable Weight
	Nominal	Approx.	Nominal	Nominal	Max.	Approx.	Prib.
N x mm ²	n x mm	mm	mm	mm	Ohm/Km	mm	Kg/Km
1 x 4.0	56/0.3	2.60	0.7	0.8	5.09	6.10	53
1 x 6.0	84/0.3	3.17	0.7	0.8	3.39	7.20	74